


Features

- **FloorScore** certified
- Patented 5G Uniclic® Joint is proven to effectively reduce the chances of unsightly gapping
- Micro Bevel reduces minor issues with flatness of the subfloor and add to a more realistic appearance
- Built-in natural air-cushioning cork underlayment that has superior sound absorption and thermal insulation properties
- Wear layer is enhanced with Armor Care technology, making it exceptionally stain and scratch resistant

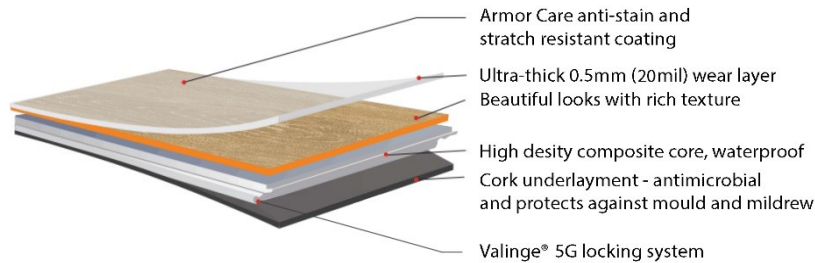

Product Information

Product Line	SureWood Luxury Vinyl Flooring
Construction	WPC (wood plastic composite) vinyl
Dimension	8mm x 180mm x 1220mm includes 1.5mm antimicrobial cork underlayment
Wear Layer Thickness	0.5mm (20mil)
Finish	Completely recyclable
Warranty	30 Year Residential and 12 Year Commercial Warranty
Installation	Please refer to Installation Instruction, Care and Maintenance

Essential Characteristics

Characteristics	Test Method	Requirement	Our products test result
Reaction to fire	EN13501-1	National requirement	Class B fl-s1
Content of pentachlorophenol	CEN/TR 14823	No content allowed	No content
Slip resistance	DIN 51130	R10	R10
Electrical behaviour	EN 1815	< 2.0 kV (Antistatic)	< 2.0 kV
Formaldehyde Emission		Not Detected	EN717-1
Migration of heavy metals		Not Detected	EN717-1

Classification Requirements

Characteristic	Test Method	Requirement	Our products test result
Abrasion resistance	EN 13329 Annex E	>6000 (IP)	>6000(IP)
Resistance to staining	EN 438	5(group 1&2) 4(group 3)	5(group 1&2) 4(group 3)
Effect of a furniture leg	EN 424	No damage shall be visible, when tested with foot type 0	No change or damage
Effect of castor chair	EN 425	No change in appearance or damage, as defined in EN12529	No change or damage
Resistance to staining	EN 423	Index 0: Not effected	Not Effected
Color fastness	EN ISO 105B02	Blue wool scale ≥6	Blue wool scale ≥6
Color fastness	EN ISO 20105A02	Grey scale ≥4	Grey scale ≥4
Impact Sound Insulation	ISO 10140-3	10 dB	9 dB

Physical Statistics	Result	Method
Dimensional Stability to Heat	≤0.12%(80C,6Hrs)	EN434
Curling After Exposure to Heat	≤1.2mm(80C,6Hrs)	EN434
Wear Resistance	≤0.015g	EN-660-2
Peel Resistance	≥2.8kgf/2cm	EN431
Residual Indentation After Static Loading	≤0.1mm	EN434
Flexibility	No Damage	EN435

Packaging Information					
	Length (mm)	Width (mm)	Thickness (mm)	Sq. ft. per Carton	Weight (lb. per carton)
Plank	1220	180	8		
Carton	1232	191	70	19	31

Pallet Information							
	Length (mm)	Width (mm)	Height (mm)	Volume (m ³)	# of carton per Pallet	Sq. ft. /pallet	Weight (lb.)
Pallet	1245	965	991	1.19	70	1330	2170