


Features

- Trendy design - Coastal collection features the muted colors of driftwood and sandy beach in wide planks
- Indoor Air Quality and Formaldehyde Emission tests: **FloorScore and E1 certified, no added urea formaldehyde**
- Aqua-Guard and Armor-Shield technology on all 4 sides protect against moisture and reduce squeaking

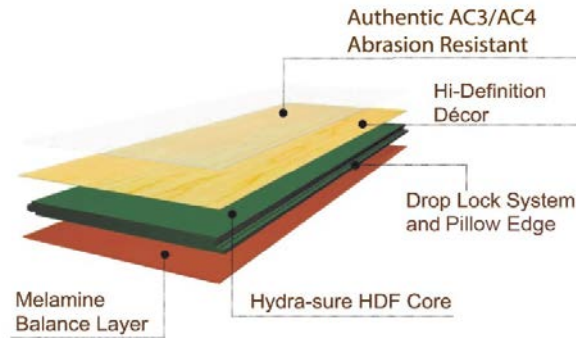

Product Information





Product Line	Coastal Laminate Flooring - Available in Western Canada only
Construction	Drop & Lock licensed by Unilic® and Valinge™
Dimensions	12.3mm x 168mm x 1215mm Pillow edge
Core	High density fiberboard, density >850 kg/m ³
Warranty	Please refer to Warranty
Installation	Please refer to Installation Instruction, Care and Maintenance Guide

Essential Characteristics

Characteristics	Test Method	Requirement	Our products test result
Reaction to fire	EN13501-1	National requirement	Class C fl-s1
Content of pentachlorophenol	CEN/TR 14823	No content allowed	No content
Slip resistance	EN 13893	Class DS: $\mu \geq 0.30$	DS
Formaldehyde Emission	EN 717-1	<0.124 mg/m ³ (E1)	E1


Classification Requirements

Characteristic	Test Method	Evaluation
Effect of a furniture leg	EN 424 - no visible damage when tested with foot type 0	No change or damage
Effect of castor chair	EN12529 - No change in appearance or damage	No change or damage
Abrasion resistance	EN 13329 Annex E, AC4 > 4000 (IP)	> 4000 (IP)
Impact resistance	EN 13329 Annex F, IC1, Small ball >200mm Large ball >1000mm	IC1
Resistance to staining	EN 438 -5 (Group 1 & 2) 4 (Group 3)	Group 1, 2, 3
Resistance to cigarette burn	EN 438 - Class 4	Class 4
Light fastness	EN ISO 105B02: Blue wool scale ≥ 6	Blue wool scale ≥ 6
Light fastness	EN ISO 20105A02: Grey scale ≥ 4	Grey Scale ≥ 4
Surface soundness	EN 13329 Annex D: $\geq 1.0N/mm^2$	$\geq 1.0N/mm^2$

Tolerance	
Thickness swelling	≤18% with AVG 15%
Dimensional stability	≤0.9mm
Thickness Variance	≤0.5mm
Openings between join panels	≤0.15mm
Dimension Tolerance Length & Width (mm)	
Squareness (mm)	
Height Variation (mm)	
Edge Straightness (mm)	
Flatness	Width Flatness, concave<0.15%, convex<0.20% Length Flatness, concave<0.50%, convex<1.0%

Packaging Information					
	Length (mm)	Width (mm)	Thickness (mm)	Sq. ft. per Carton	Weight (lb. per carton)
Plank	1215	168	12.3		
Carton	1235	180	125	22	48

Pallet Information							
	Length (mm)	Width (mm)	Height (mm)	Volume (m ³)	# of carton per Pallet	Sq. ft. /pallet	Weight (lb.)
Pallet	1235	975	950	1.14	40	880	1920

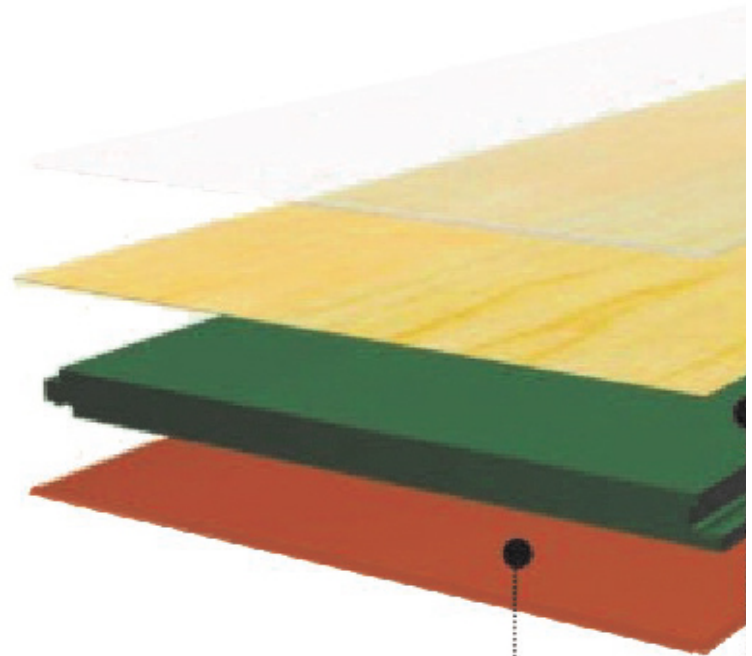

Melamine
Balance Layer

Authentic AC3/AC4 Abrasion Resistant

WATER RESISTANT

