


Features

- **FloorScore®** certified
- **Armor Care** technology: 2-pass UV cured urethane finish that is exceptionally stain and scratch resistant
- **Fiberglass mesh** layer provides superior dimensional stability, which enables the product to better withstand flux in temperature. It also helps the product contour to minor telegraphing in the subfloor.

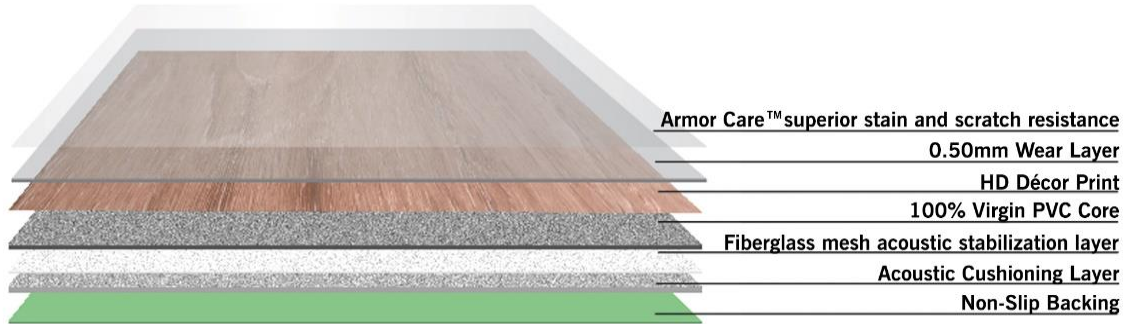

Product Information

Product Line	High Performance Luxury Vinyl Flooring
Construction	LooseLay Vinyl
Dimension	5mm x 187mm x 1227mm
Wear Layer Thickness	0.5mm (20 mil)
Finish	2-pass UV cured Urethane Finish
Installation	LooseLay or Glue Down
Warranty	Lifetime Residential and 15-Year Commercial Warranty. Conditions apply.

Testing

Classification	Method	Result
Class	ASTM F1700	Class III, Type B - Embossed
Slip Resistance	ASTM C1028-07	≥0.65 (Wet, Dry)
Static Load	ASTM F970	Applied Load: 1000 psi, Residual Indentation: 0.04mm
Impact Isolation Class	ASTM E492-09	71
Sound Transmission Class	ASTM E90-09	69
Dimensional Stability	ASTM F2199	Pass: ≤0.02 in. per linear foot
Resistant to Chemicals	ASTM F925	Pass: Not affected
Abrasion	ASTM D4060	Test Revolutions: 1000, 0.004% mass loss
Antibacterial Activity	ASTM G21-15	Pass: No growth observed on specimens
Reaction to Fire	EN13501-1	Class B fl-s1
Critical Radiant Flux	ASTM E648	Pass, >0.45 watts/cm ²
Concentration of Dibutyl Phthalate	ISO 16000	<1 µg/m ³ after 28 days
Concentration of Diethylhexyl Phthalate	ISO 16000	<1 µg/m ³ after 28 days
Flexibility	EN435	No Damage

Packaging Information

	Length (mm)	Width (mm)	Thickness (mm)	Sq. ft. per Carton	Weight (lb. per carton)
Plank	1227	187	5		
Carton	1250	190	45	19.8	47

Pallet Information							
	Length (mm)	Width (mm)	Height (mm)	Volume (m ³)	# of carton per Pallet	Sq. ft. /pallet	Weight (lb.)
Pallet	1250	800	660	0.66	48	950.4	2256