


# SureWood Plus Collection

## Features

- **FloorScore** certified
- Patented 5G Uniclic® Joint is strongest on the market, and proven to effectively reduce the chances of gapping
- Painted bevels add to a more realistic appearance. Made to closely resemble grout line on tiles
- Built-in antimicrobial cork underlayment has superior sound absorption and thermal insulation properties
- Wear layer is enhanced with Armor Care technology, making it exceptionally stain and scratch resistant

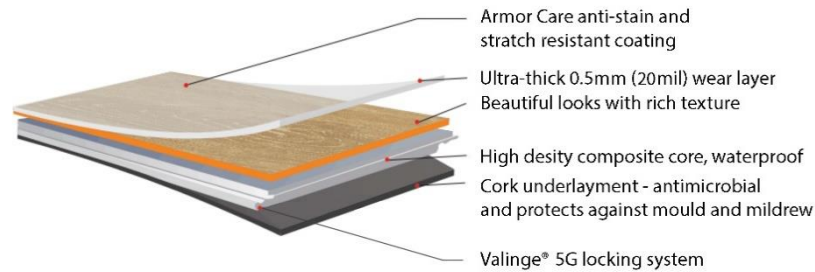

## Product Information

<b>Product Line</b>	SureWood Plus Luxury Vinyl Flooring
<b>Construction</b>	WPC (wood plastic composite) vinyl, includes 1.5mm antimicrobial cork underlayment
<b>Dimension</b>	King size: 5/16" (20 mil wear layer) x 8-7/8" x 60" California size: 11/32" (20 mil wear layer) x 8-7/8" x 72"
<b>Wear Layer Thickness</b>	0.5mm (20mil)
<b>Material</b>	Completely recyclable
<b>Warranty</b>	Lifetime Residential and 12 Year Commercial Warranty
<b>Installation</b>	Please refer to Installation Instruction, Care and Maintenance

## Essential Characteristics

Characteristics	Test Method	Requirement	Our products test result
Reaction to fire	EN13501-1	National requirement	Class B fl-s1
Content of pentachlorophenol	CEN/TR 14823	No content allowed	No content
Slip resistance	DIN 51130	R10	R10
Electrical behaviour	EN 1815	< 2.0 kV (Antistatic)	< 2.0 kV
Formaldehyde Emission		Not Detected	EN717-1
Migration of heavy metals		Not Detected	EN717-1

## Classification Requirements

Characteristic	Test Method	Requirement	Our products test result
Abrasion resistance	EN 13329 Annex E	>6000 (IP)	>6000(IP)
Resistance to staining	EN 438	5(group 1&2) 4(group 3)	5(group 1&2) 4(group 3)
Effect of a furniture leg	EN 424	No damage shall be visible, when tested with foot type 0	No change or damage
Effect of castor chair	EN 425	No change in appearance or damage, as defined in EN12529	No change or damage
Resistance to staining	EN 423	Index 0: Not effected	Not Effected
Color fastness	EN ISO 105B02	Blue wool scale ≥6	Blue wool scale ≥6
Color fastness	EN ISO 20105A02	Grey scale ≥4	Grey scale ≥4
Impact Sound Insulation	ISO 10140-3	10 dB	9 dB

## SureWood Plus Collection

Physical Statistics	Result	Method
Dimensional Stability to Heat	≤0.12%(80C,6Hrs)	EN434
Curling After Exposure to Heat	≤1.2mm(80C,6Hrs)	EN434
Wear Resistance	≤0.015g	EN-660-2
Peel Resistance	≥2.8kgf/2cm	EN431
Residual Indentation After Static Loading	≤0.1mm	EN434
Flexibility	No Damage	EN435

Packaging Information					
	Length (mm)	Width (mm)	Thickness (mm)	Sq. ft. per Carton	Weight (lb. per carton)
<b>King Size</b>	1510	225	8		
<b>California Size</b>	1830	225	8.5		
<b>King Size Carton</b>	1530	235	58	22.2	36
<b>California Size Carton</b>	1840	235	60	26.62	47

Pallet Information							
	Length (mm)	Width (mm)	Height (mm)	Volume (m <sup>3</sup> )	# of carton per Pallet	Sq. ft. /pallet	Weight (lb.)
<b>King Size Pallet</b>	1530	940	880	1.27	60	1332	2160
<b>California Size Pallet</b>	1840	940	800	1.38	52	1384.24	2444