



Features

- FloorScore certified no traces of VOCs, phthalate-free, no formaldehyde off-gassing, and are 100% recyclable.
- Patented Välinge[®] 5G Joint is strongest on the market, and proven to effectively reduce the chances of gapping
- Painted bevels add to a more realistic appearance. Made to closely resemble grout line on tiles
- Built-in antimicrobial cork underlayment has superior sound absorption and thermal insulation properties
- Armor Care technology: 2-pass UV cured urethane finish that is exceptionally stain and scratch resistant

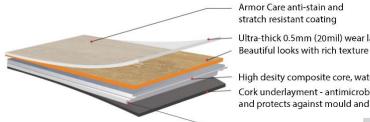

stratch resistant coating Ultra-thick 0.5mm (20mil) wear layer



Valinge® 5G locking system



Product Information				
Product Line	SureWood Luxury Vinyl Flooring			
Construction	WPC (wood polymer composite) vinyl			
Dimension	8mm (T) x 180mm (W) x 1220mm (L)			
Underlayment	1.5mm antimicrobial cork underlayment			
Wear Layer Thickness	0.5mm (20 mil)			
Finish	2-pass UV cured Urethane Finish			
Installation	Floating installation by clicking the end joints together. Please refer to Installation Instruction			
Warranty	30 Year Residential and 12 Year Commercial Warranty			

Testing					
Classification	Method	Result			
Class	ASTM F1700	Class III, Type B - Embossed			
Slip Resistance	ASTM C1028-07	Dry: 0.80; Wet: 0.71			
Static Load	ASTM F970	Applied Load: 1000 psi, Residual Indentation: 0.04mm			
ΔΙΙC	ASTM E2179-03	23			
IIC	ASTM E492-09	72			
STC	ASTM E90-09	71			
Dimensional Stability	ASTM F2199	Pass: ≤0.02 in. per linear foot			
Resistant to Chemicals	ASTM F925	Pass: Not affected			
Abrasion	ASTM D4060	Test Revolutions: 1000, 0.004% mass loss			
Antibacterial Activity	ASTM G21-15	Pass: No growth observed on specimens			
Reaction to Fire	EN13501-1	Class B fl-s1			
Critical Radiant Flux	ASTM E648	Pass, >0.45 watts/cm ²			
Concentration of Dibutyl Phthalate	ISO 16000	<1 µg/m³ after 28 days			
Concentration of Diethylhexyl Phthalate	ISO 16000	<1 µg/m³ after 28 days			
Flexibility	EN435	No Damage			



Packaging Information								
	Length	gth Width Thio		Sq. ft.	Weight			
	(mm)	(mm)	(mm)	per Carton	(lb. per carton)			
Plank	1220	180	8					
Plank Carton	1232	191	70	19	31			
					1			

Pallet Information							
	Length	Width	Height	Volume	# of carton	Sq. ft.	Weight
	(mm)	(mm)	(mm)	(m³)	per Pallet	/pallet	(lb.)
Plank Pallet	1245	965	991	1.19	70	1330	2170

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.