


Features

- Wishbone Collection is a take on the classic herringbone flooring with a touch of contemporary sophistication.
- The planks can be laid in a variety of designs, including brick and basket weave patterns.
- Indoor Air Quality and Formaldehyde Emission tests: FloorScore certified, CARB 93120 Phase 2 and EPA 40 C.F.R. 770 compliant

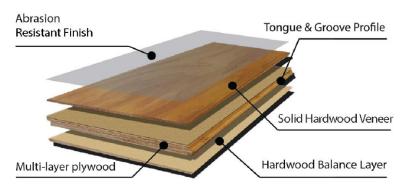

Product Information	
Product Line	Wishbone Engineered Hardwood Flooring
Construction	Tongue and Groove, Herringbone
Wood Species	White Oak
Dimensions	1/2" x 4-3/4" x 23-3/4"
The Look	Wirebrushed
Veneer and Finish	Ultra matte UV cured aluminium oxide coating for an oil-finished look
Sawn method	Sliced cut, 1.5mm veneer
Warranty	35-Year Residential Limited Warranty, 5-Year Light Commercial Limited Warranty
Installation	Please refer to Installation Instruction, Care and Maintenance Guide

Essential Characteristics					
Characteristics	Test Method	Requirement	Our products test result		
Reaction to fire	EN 13501-1	National requirement	Dfl-S1		
Content of pentachlorophenol	CEN/TR 14823	PCP ≤ 5x10 ⁻⁶ⁿ	Undetectable		
Formaldehyde Emission	EN 717-1	Class E1	Undetectable		

Classification Requirements					
Characteristic	Test Method	Valuation			
Effect of a furniture leg	EN 424	We recommend the use of protective mats			
Effect of castor chair	EN 425	We recommend using felt pads under all furniture legs			
Chemical resistance	EN 13442	Category 5			
Bond strength/gross cut test	ISO 2409	Category 0			
Slip resistance	CEN/TS15676	USRV 54(Dry)			
Moisture content	EN 13489	6-9%			

www.twelveoaks.ca 1 of 2



Wishbone

Sustainability					
Performance	Certifications/Credits	Minimum Requirements	Performance vs		
		willimum kequirements	Requirements		
Low Emitting Material	CARB ATCM93120	Phase 2	Compliant		
Low Emitting Material	LEED EQ	CDPH SM v1.1 - 2010	FloorScore Certified		

Tolerance	
Thickness Variance	≤0.5mm
Openings between join panels	≤0.15mm
Dimension Tolerance Length & Width (mm)	± 0,10 mm
Squareness (mm)	ø± 0,10 mm max min. <= 0,20 mm
Height Variation (mm)	ø<= 0,10 mm max. 0,15 mm
Edge Straightness (mm)	= <= 0,30 mm
Flatness	Width Flatness, concave<0.15%, convex<0.20% Length Flatness, concave<0.50%, convex<1.0%

Packaging Information						
	Length	Width	Thickness	Sq. ft.	Weight	
	(mm)	(mm)	(mm)	per Carton	(lb. per carton)	
Plank	600	120	12			
Carton	605	245	225	28	47	

Pallet Information							
	Length	Width	Height	Volume	# of carton	Sq. ft.	Weight
	(mm)	(mm)	(mm)	(m³)	per Pallet	/pallet	(lb.)
Pallet	1210	980	1000	1.19	32	896	1504









ENG804

www.twelveoaks.ca 2 of 2