


**Features**

- All of the 7"x 48" and 9"x 60" products are equipped with Registered Embossing technology
- 100% Waterproof | 20 mil wear layer | Built-in fiberglass acoustic layer | Industry approved sound rating
- Scratch and stain resistant. Able to withstand virtually everything that life throws at it.
- Indoor Air Quality FloorScore certified & Phthalate free
- Glue down installation. Boards are individually replaceable

**Product Information**

| Construction                    | Thickness            | Wear Layer          | Width & Length  |                     | The Look   |
|---------------------------------|----------------------|---------------------|---|---------------------|--|
| 5mm Vinyl                       | 5mm                  | 0.5mm   20 mil      | 7" x 48"   178mm x 1220mm<br>9" x 60"   229mm x 1524mm<br>18" x 36"   457mm x 914mm |                     | Ultra Realistic  |
| Finish                          | Residential Warranty | Commercial Warranty | Installation  | Glue Recommendation | Installation Instruction   |
| 2-pass UV cured Urethane Finish | Lifetime             | 15-Year             | Glue Down   | Uzin KE66/KE2000    | Please refer to Installation Instruction, Care and Maintenance Guide |

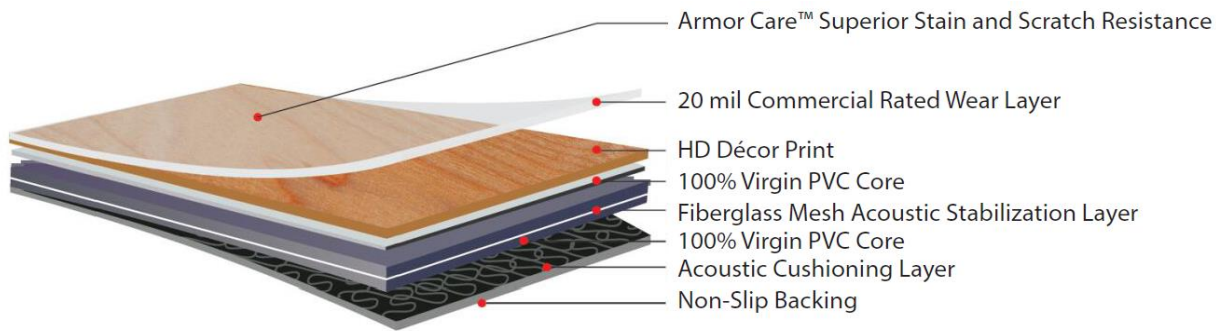

**Testing**

| Classification                | Method         | Result                             |
|-------------------------------|----------------|------------------------------------|
| <b>Class</b>                  | ASTM F1700     | Class III, Type B - Embossed       |
| <b>Slip Resistance</b>        | ASTM D2047-17  | Pass; Dry: 0.68; Wet: 0.75         |
| <b>Static Load</b>            | ASTM F970-17   | Pass; Residual Indentation: 0.03mm |
| <b>Residual Indentation</b>   | ASTM F1914-18  | Pass                               |
| <b>Dimensional Stability</b>  | ASTM F2199-20  | Pass                               |
| <b>Resistant to Light</b>     | ASTM F1515-15  | Pass; $\Delta E^*_{ab}=0.46$       |
| <b>Resistant to Chemicals</b> | ASTM F925-13   | Pass; Rating 0: No change          |
| <b>Heat Flux</b>              | ASTM E648-19   | Pass; Class I                      |
| <b>Smoke Density</b>          | ASTM E662-2019 | See report                         |
| <b>IIC</b>                    | ASTM E492-09   | 73                                 |
| <b>STC</b>                    | ASTM E90-09    | 73                                 |

**Packaging Information**

|                  | Length | Width | Thickness | Sq. ft.    | Weight           |
|------------------|--------|-------|-----------|------------|------------------|
|                  | (mm)   | (mm)  | (mm)      | per Carton | (lb. per carton) |
| <b>7" x 48"</b>  | 1225   | 180   | 55        | 23.4       | 47               |
| <b>9" x 60"</b>  | 1530   | 230   | 35        | 22.5       | 45               |
| <b>18" x 36"</b> | 820    | 460   | 35        | 27         | 54               |

**Pallet Information**

|                  | Size             | Volume            | # of carton | Sq. ft. | Weight |
|------------------|------------------|-------------------|-------------|---------|--------|
|                  | (mm)             | (m <sup>3</sup> ) | per Pallet  | /pallet | (lb.)  |
| <b>7" x 48"</b>  | 1225 x 900 x 760 | 0.84              | 60          | 1404    | 2820   |
| <b>9" x 60"</b>  | 1530 x 920 x 625 | 0.88              | 55          | 1237.5  | 2475   |
| <b>18" x 36"</b> | 820 x 820 x 870  | 0.58              | 44          | 1188    | 2376   |