


**Product Information**

Construction	Thickness	Wear Layer	Length	Width	Underlayment
SPC Vinyl	6mm	0.5mm   20 mil	Tile: 24"   610mm Plank: 60"   1522mm 48"   1220mm	Tile: 12"   305mm Plank: 8-7/8"   225mm 7"   180mm	Including 1.5mm IXPE Underlayment
Finish	The Look	Residential Warranty	Commercial Warranty	Locking System	Installation Instruction
2-pass UV cured Urethane Finish	Ultra Realistic	Lifetime	15-Year	Välinge® 5G Locking	Please refer to Installation Instruction, Care and Maintenance Guide

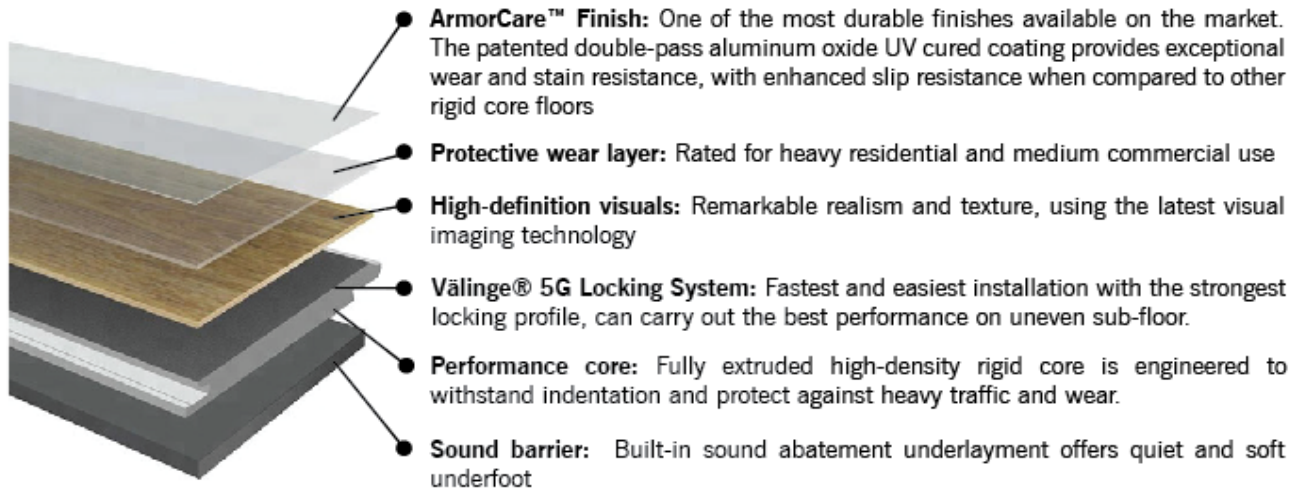

- FloorScore Certified - no traces of VOCs, phthalate-free, no formaldehyde off-gassing, and are 100% recyclable.

**Testing**

Classification	Method	Result
Class	ASTM F1700-18	Class III, Type B - Embossed
Residual Indentation	ASTM F1914-17	Pass
Slip Resistance	ASTM C1028-07	Dry: 0.84; Wet: 0.77
Static Load	ASTM F970-17	0.07mm
Dimensional Stability	ASTM F2199-09	Pass
Resistant to Heat	ASTM F1514-03	Pass
Resistant to Chemicals	ASTM F925-13	Pass
Resistant to Light	ASTM F1515-15	Pass
Critical Radiant Flux	ASTM E648-17	Class I
ΔIIC	ASTM E2179-03	25
IIC	ASTN E492-09	71
STC	ASTM E90-09	71

**Packaging Information**

	Length	Width	Thickness	Sq. ft.	Weight
	(mm)	(mm)	(mm)	per Carton	(lb. per carton)
<b>60" Plank</b>	1522	225	6		
<b>60" Plank Carton</b>	1530	230	45	22.2	43
<b>48" Plank</b>	1220	180	6		
<b>48" Plank Carton</b>	1235	195	65	23.7	46
<b>Tile</b>	610	305	6		
<b>Tile Carton</b>	615	310	65	20	40

**Pallet Information**

	Dimension	Volume	# of carton	Sq. ft.	Weight
	(mm)	(m <sup>3</sup> )	per Pallet	/pallet	(lb.)
<b>60" Plank Pallet</b>	1530 x 910 x 730	1.02	56	1243.2	2408
<b>48" Plank Pallet</b>	1235 x 975 x 680	0.82	50	1185	2300
<b>Tile Pallet</b>	1230 x 620 x 1170	0.89	72	1440	2880