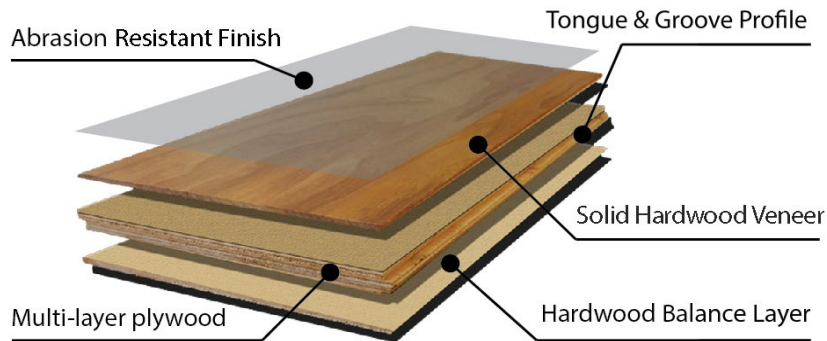


Features

The Artisan Select Collection is a symphony of contrasts-where old-world charm meets contemporary vision. These floors are not merely surfaces; they are foundations for storytelling, inspired by the iconic places, moments, and materials that shape our sense of grandeur and legacy. With its wide planks and rich textures, Artisan Select transforms spaces into living galleries, celebrating both history and modernity. This collection captures the essence of bold, artisanal skill, evoking a sense of place and purpose in every design. Unlike collections that seek uniformity, Artisan Select thrives on individuality. Whether you're drawn to the brightness of a coastal morning or the mystery of shadowed waters, Artisan Select offers a palette that brings stories to life underfoot.



Product Information

Product Line	Artisan Select Engineered Hardwood Flooring
Construction	Tongue and Groove
Wood Species	White Oak and Hickory
Dimensions	White Oak and Hickory : 3/4" x 7-1/2" x 75" R.L.
The Look	Handscraped and/or Wirebrushed
Veneer and Finish	8 coats of UV cured Traffert® polyurethane finish with color-activate stain technology, topped with a protective layer of Aluminum Oxide.
Sawn method	All are sliced sawn
Warranty	35 years residential and 5 years commercial warranty
Installation	Please refer to Installation Instruction, Care and Maintenance Guide

Essential Characteristics

Characteristics	Test Method	Requirement	Our products test result
Reaction to fire	EN13501-1	National requirement	Class C fl-s1
Content of pentachlorophenol	CEN/TR 14823	No content allowed	No content
Slip resistance	EN 13893	Class DS: $\mu \geq 0.30$	DS
Formaldehyde Emission	EN 717-1	≤ 0.5 mg/L	Pass






Classification Requirements

Characteristic	Test Method	Valuation
Effect of a furniture leg	EN 424	We recommend the use of protective mats
Effect of castor chair	EN 425	We recommend using felt pads under all furniture legs
Chemical resistance	EN 13442	Category 5
Bond strength/gross cut test	ISO 2409	Category 0



Engineered Hardwood Flooring
Artisan Select

Tolerance

Thickness Variance	$\leq 0.5\text{mm}$
Openings between join panels	$\leq 0.15\text{mm}$
Dimension Tolerance Length & Width (mm)	 $\pm 0.10\text{ mm}$ $\pm 0.50\text{ mm}$
Squareness (mm)	 $\pm 0.10\text{ mm}$ max. - min. $\leq 0.20\text{ mm}$
Height Variation (mm)	 $\phi \leq 0.10\text{ mm}$ max. 0.15 mm 
Edge Straightness (mm)	 $\leq 0.30\text{ mm}$
Flatness	Width Flatness, concave $< 0.15\%$, convex $< 0.20\%$ Length Flatness, concave $< 0.50\%$, convex $< 1.0\%$

Packaging Information (White oak)

	Length (mm)	Width (mm)	Thickness (mm)	Sq. ft. per carton	Weight lb/box
Plank	1900	165	18		
Carton	1920	175	118	20.3	48.0

Packaging Information (Hickory)

	Length (mm)	Width (mm)	Thickness (mm)	Sq. ft. per carton	Weight lb/box
Plank	1900	165	18		
Carton	1920	175	118	19.2	48.0

Pallet information (White oak and Hickory)

	Length (mm)	Width (mm)	Height (mm)	Volume (m ³)	# of carton per Pallet	Sq. ft. /pallet	Weight (lb.)
Pallet	1835	1080	1014	2.01	48	974	2304