


Product Information

Construction	Thickness	Wear Layer	Length	Width	Underlayment
Dryback Vinyl	3mm	0.75mm 30 mil	Plank: 48-1/4" 1227mm Tile: 24" 610mm	Plank: 7-3/8" 187mm Tile: 12" 305mm	N/A
Finish	The Look	Residential Warranty	Commercial Warranty	Locking System	Installation Instruction
2-pass UV cured Urethane Finish	Ultra Realistic	Lifetime	15-Year	N/A	Please refer to Installation Instruction, Care and Maintenance Guide

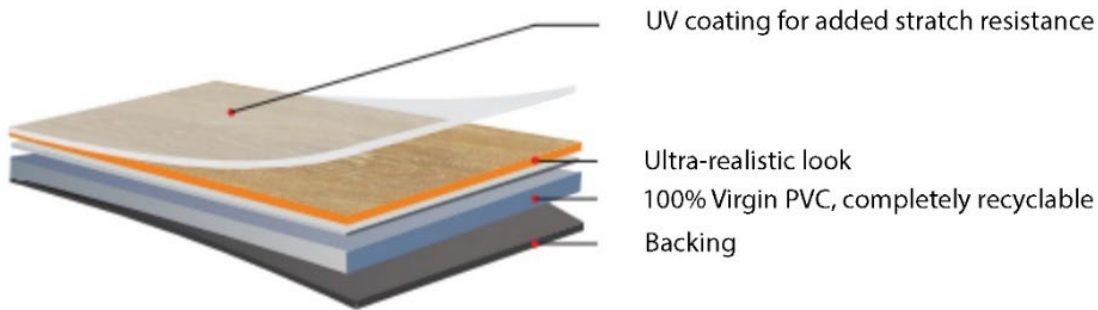

- FloorScore Certified – no traces of VOCs, phthalate-free, no formaldehyde off-gassing, and 100% recyclable.

Testing

Classification	Method	Result
Class	ASTM F1700	Class III, Type B - Embossed
Slip Resistance	ASTM C1028-07	Dry: 0.80; Wet: 0.71
Static Load	ASTM F970-15	Residual Indentation: 0.04mm
Dimensional Stability	ASTM F2199-09	Pass
Resistant to Chemicals	ASTM F925-13	Pass: No change
Residual Indentation	ASTM F1914-07	Pass
Abrasion	ASTM D4060-14	1000g Load 5000 Cycles 91mg weight loss
Antibacterial Activity	ASTM G21-15	Pass: No growth observed on specimens
Resistant to Heat	ASTM F1514-03	Pass
Castor Chair Resistance	NALFA LF01-2011	No Visible Damage
Reaction to Fire	EN13501-1	Class Bfl - s1
Smoke Density	ASTM E 662-2019	Pass: No flaming dripping & no flaming running on Flaming & non-flaming modes
Critical Radiant Flux	ASTM E648-19a	Pass

Packaging Information

	Length	Width	Thickness	Sq. ft.	Weight
	(mm)	(mm)	(mm)	per Carton	(lb. per carton)
Plank	1227	187	3		
Plank Carton	1237	197	49	34.6	36.7
Tile	610	305	3		
Tile Carton	620	312	55	32.1	34

Pallet Information

	Dimension	Volume	# of carton	Sq. ft.	Weight
	(mm)	(m ³)	per Pallet	/pallet	(lb.)
Plank Pallet	1237 x 985 x 608	0.74	60	2076	2202
Tile Pallet	1237 x 1872 x 625	1.45	66	2118.6	2244