


Product Information					
Construction	Thickness	Wear Layer	Length	Width	Underlayment
SPC Vinyl	6mm	0.5mm 20 mil	48" 1220mm	7" 180mm	Including 1mm IXPE Underlayment
Finish	The Look	Residential Warranty	Commercial Warranty	Locking System	Installation Instruction
2-pass UV cured Urethane Finish	Ultra Realistic	Lifetime	12-Year	Välinge® 5G Locking	Please refer to Installation Instruction, Care and Maintenance Guide

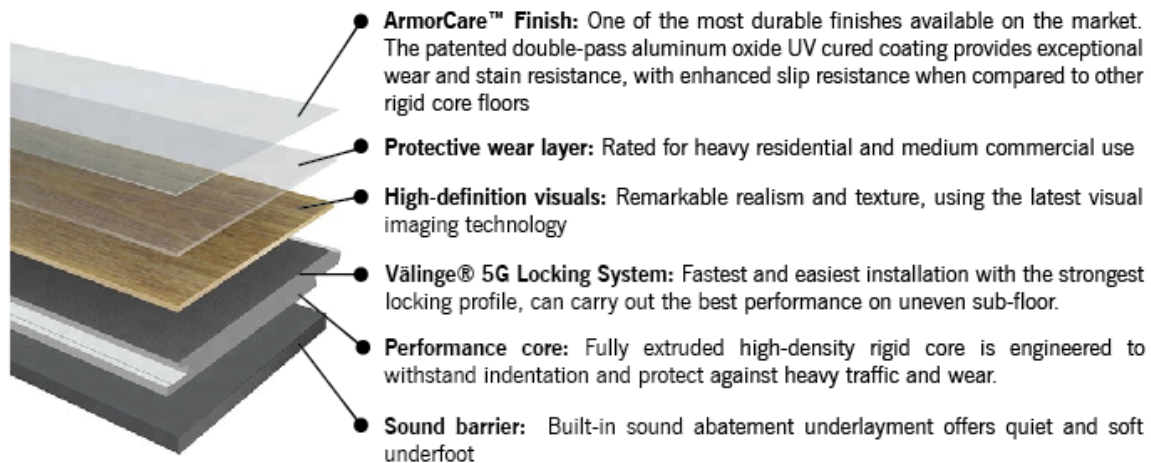

- No traces of VOCs, phthalate-free, no formaldehyde off-gassing, and are 100% recyclable.

Testing		
Classification	Method	Result
Class	ASTM F1700-18	Class III, Type B - Embossed
Residual Indentation	ASTM F1914-17	Pass
Slip Resistance	ASTM C1028-07	Dry: 0.84; Wet: 0.77
Static Load	ASTM F970-17	0.07mm
Dimensional Stability	ASTM F2199-09	Pass
Resistant to Heat	ASTM F1514-03	Pass
Resistant to Chemicals	ASTM F925-13	Pass
Resistant to Light	ASTM F1515-15	Pass
Critical Radiant Flux	ASTM E648-17	Class I
ΔIIC	ASTM E2179-03	25
IIC	ASTN E492-09	71
STC	ASTM E90-09	71

Packaging Information

	Length	Width	Thickness	Sq. ft.	Weight
	(mm)	(mm)	(mm)	per Carton	(lb. per carton)
Plank	1220	180	6		
Plank Carton	1230	190	52	19.0	40

Pallet Information

	Dimension	Volume	# of carton	Sq. ft.	Weight
	(mm)	(m³)	per Pallet	/pallet	(lb.)
Plank Pallet	1230 x 1140 x 616	0.86	55	1045	2200