


Features

- FloorScore certified
- 100% waterproof, impervious to water damage
- Uniquely designed fiberglass mesh layer dampens sound, and offers warm and comfortable underfoot
- Wear layer is enhanced with Armor Care technology, making it exceptionally stain and scratch resistant

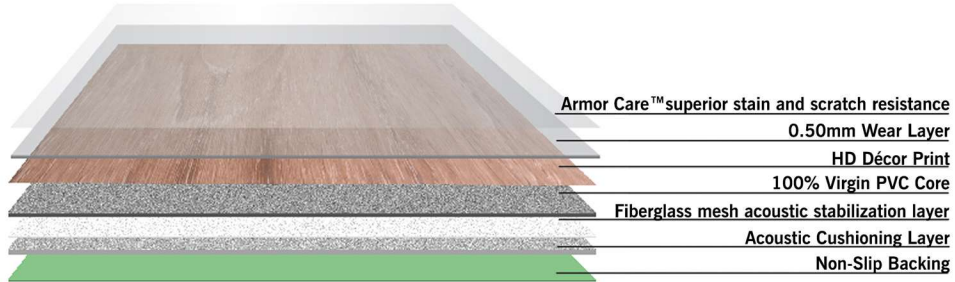

Product Information

Product Line	LooseLay Luxury Vinyl Plank
Construction	Looselay
Dimension	5mm (T) x 7-1/4" (W) x 48"(L)
Wear Layer Thickness	0.50 mm
Finish	Made with 100% virgin PVC, Completely recyclable
Warranty	Lifetime Residential and 15-Year Commercial Warranty
Installation	Please refer to Installation Instruction, Care and Maintenance

Essential Characteristics

Characteristics	Test Method	Requirement	Our products test result
Reaction to fire	EN13501-1	National requirement	Class B fl-s1
Content of pentachlorophenol	CEN/TR 14823	No content allowed	No content
Slip resistance	DIN 51130	R10	R10
Electrical behaviour	EN 1815	< 2.0 kV (Antistatic)	< 2.0 kV
Formaldehyde Emission		Not Detected	EN717-1
Migration of heavy metals		Not Detected	EN717-1

Classification Requirements

Characteristic	Test Method	Requirement	Our products test result
Abrasion resistance	EN 13329 Annex E	AC5 >6000 (IP)	>6000(IP)
Resistance to staining	EN 438	5(group 1&2) 4(group 3)	5(group 1&2) 4(group 3)
Effect of a furniture leg	EN 424	No damage shall be visible, when tested with foot type 0	No change or damage
Effect of castor chair	EN 425	No change in appearance or damage, as defined in EN12529	No change or damage
Resistance to staining	EN 423	Index 0: Not effected	Not Effected
Color fastness	EN ISO 105B02	Blue wool scale ≥6	Blue wool scale ≥6
Color fastness	EN ISO 20105A02	Grey scale ≥4	Grey scale ≥4
Impact Sound Insulation	ISO 10140-3	10 dB	9 dB

Physical Statistics	Result	Method
Dimensional Stability to Heat	≤0.12%(80C,6Hrs)	EN434
Curling After Exposure to Heat	≤1.2mm(80C,6Hrs)	EN434
Wear Resistance	≤0.015g	EN-660-2
Peel Resistance	≥2.8kgf/2cm	EN431
Residual Indentation After Static Loading	≤0.1mm	EN434
Flexibility	No Damage	EN435

Packaging Information					
	Length (mm)	Width (mm)	Thickness (mm)	Sq. ft. per Carton	Weight (lb. per carton)
Plank	1227	187	5		
Carton	1250	190	45	19.8	47

Pallet Information							
	Length (mm)	Width (mm)	Height (mm)	Volume (m ³)	# of carton per Pallet	Sq. ft. /pallet	Weight (lb.)
Pallet	1250	800	660	0.66	48	950.4	2256